



2022
OUTDOOR
PRODUCT
CATALOGUE

WWW.VALENS.COM.TR

OUTDOOR LED FLOODLIGHT



PRODUCT CODE	WATTAGE	SIZE	LUMEN	COLOR TEMPERATURE	DIMMABLE	INPUT VOLTAGE	QTY/CTN	BASE
VL-4010	10 W	Ø 110 mm	900lm	3200-6500K	NO	220-240V AC 50Hz.		IP66
VL-4030	30 W	Ø 150 mm	2700lm	3200-6500K	NO	220-240V AC 50Hz.		IP66
VL-4050	50 W	Ø 170 mm	4500lm	3200-6500K	NO	220-240V AC 50Hz.		IP66
VL-4100	100 W	Ø 225 mm	9000lm	3200-6500K	NO	220-240V AC 50Hz.		IP66
VL-4150	150 W	Ø 250 mm	13500lm	3200-6500K	NO	220-240V AC 50Hz.		IP66
VL-4200	200 W	Ø 320 mm	18000lm	3200-6500K	NO	220-240V AC 50Hz.		IP66

OUTDOOR LED WALLWASHER



PRODUCT CODE	WATTAGE	SIZE	LUMEN	COLOR TEMPERATURE	DIMMABLE	INPUT VOLTAGE	QTY/CTN	BASE
VL-1203	3 W	Φ100 mm	360lm	2700-6500K	NO	165-240V / 110-240V		E 27
VL-1206	6 W	Φ200 mm	720lm	2700-6500K	NO	165-240V / 110-240V		E 27
VL-1209	9 W	Φ300 mm	1080lm	2700-6500K	NO	165-240V / 110-240V		E 27
VL-1212	12 W	Φ350 mm	1440lm	2700-6500K	NO	165-240V / 110-240V		E 27
VL-1218	18 W	Φ500 mm	2160lm	2700-6500K	NO	165-240V / 110-240V		E 27
VL-1224	24 W	Φ700 mm	2880lm	2700-6500K	NO	165-240V / 110-240V		E 27
VL-1236	36 W	Φ1000 mm	4320lm	2700-6500K	NO	165-240V / 110-240V		E 27
VL-1245	45 W	Φ1200 mm	5400lm	2700-6500K	NO	165-240V / 110-240V		E 27
VL-1254	54 W	Φ1500 mm	6480lm	2700-6500K	NO	165-240V / 110-240V		E 27

PROFESSIONAL SERIES

5 years
Warranty



Design

We aim to meet the design lines that make a difference with the LED Lighting technologies and to make use of them by transforming into a form compatible with the environment.



High Performance

With the right component, body and cooler in the led lighting, it reaches the highest light intensity at low temperatures keeping the energy to a minimum.



Long Life

Designed to work with maximum efficiency even in areas with high temperatures, the LED Lighting body structure ensures long life use.

Led

SAMSUNG

CREE ⇄ **LED**

Driver

MOSO®

MW
MEAN WELL

TRIDONIC

OUTDOOR LED FLOODLIGHT



* LED Floodlight Technical Features:

Lamp Type: Power LED

Warranty: 5 Year

Housing: Aluminium

Glass: 5mm Tempered

Paint: Electrostatic powder coating

IP: 65

Kelvin: 3000-4000-6000

CRI: >80

LED Lifetime: 50.000 h

Power Supply: 220-240 AC 50-60 Hz.

Connectors: Stainless

Environment: Outdoor

Operation Temp.: -20 / +45

MODEL	POWER	LED NUMBER	INPUT VOLTAGE	EFFICIENCY	LUMINOUS FLUX	BODY DIMENSIONS	PACK DIMENSION	WEIGHT
VLF50W20L	50 W	24	220-240V AC 50Hz.	%90	5600 lm	422x330x80mm	430x350x100mm	10,25kg
VLF60W24L	60 W	24	220-240V AC 50Hz.	%90	6720 lm	422x330x80mm	430x350x100mm	10,25kg
VLF85W35L	85 W	35	220-240V AC 50Hz.	%90	9800 lm	422x330x80mm	430x350x100mm	10,25kg
VLF100W42L	100 W	42	220-240V AC 50Hz.	% 90	11760 lm	422x330x80mm	430x350x100mm	10,25kg
VLF140W63L	140 W	63	220-240V AC 50Hz.	% 92	17640 lm	422x330x80mm	430x350x100mm	10,25kg

OUTDOOR LED FLOODLIGHT



* 150-180-200-220 Watt Square Floodlight Technical Features:

Lamp Type: Power LED

Warranty: 5 Year

Housing: Aluminium

Glass: 5mm Tempered

Paint: Electrostatic powder coating

IP: 65

Kelvin: 3000-4000-6000

CRI: >80

LED Lifetime: 50.000 h

Power Supply: 220-240 AC 50-60 Hz.

Connectors: Stainless

Environment: Outdoor

MODEL	POWER	LED NUMBER	INPUT VOLTAGE	EFFICIENCY	LUMINOUS FLUX	BODY DIMENSIONS	PACK DIMENSION	WEIGHT
VLF150W64L	150 W	64	220-240V AC 50Hz.	%90	17920 lm	404x345x150mm	410x350x160mm	11,25kg
VLF180W80L	180 W	80	220-240V AC 50Hz.	%90	22400 lm	404x345x150mm	410x350x160mm	11,25kg
VLF200W80L	200 W	80	220-240V AC 50Hz.	%92	24900 lm	404x345x150mm	410x350x160mm	11,25kg
VLF220W100L	220 W	100	220-240V AC 50Hz.	% 94	28000 lm	404x345x150mm	410x350x160mm	11,25kg
VLF300W100L	300 W	100	220-240V AC 50Hz.	% 96	32000 lm	404x345x150mm	410x350x160mm	11,25kg

OUTDOOR ROAD AND STREET


* Led Road Type Armature Technical Specifications:

Lamp Type: Power LED
Warranty: 5 Year
Housing: Aluminium
Glass: 5mm Tempered
Paint: Electrostatic powder coating
IP: 65
Kelvin: 3000-4000-6000
CRI: >80
LED Lifetime: 50.000 h
Power Supply: 220-240 AC 50-60 Hz.
Connectors: Stainless
Environment: Outdoor

* LED ROAD LUMINAIRE 100 - 140 WATTS

MODEL	POWER	LED NUMBER	INPUT VOLTAGE	EFFICIENCY	LUMINOUS FLUX	BODY DIMENSIONS	PACK DIMENSION	WEIGHT
RL100W36L	100 W	36	220-240V AC 50Hz.	%90	11160 lm	630x280x77mm	640x290x85mm	8,5kg
RL140W60L	140 W	60	220-240V AC 50Hz.	%90	18600 lm	630x280x77mm	640x290x85mm	8,5kg

OUTDOOR PRO LED WALLWASHER

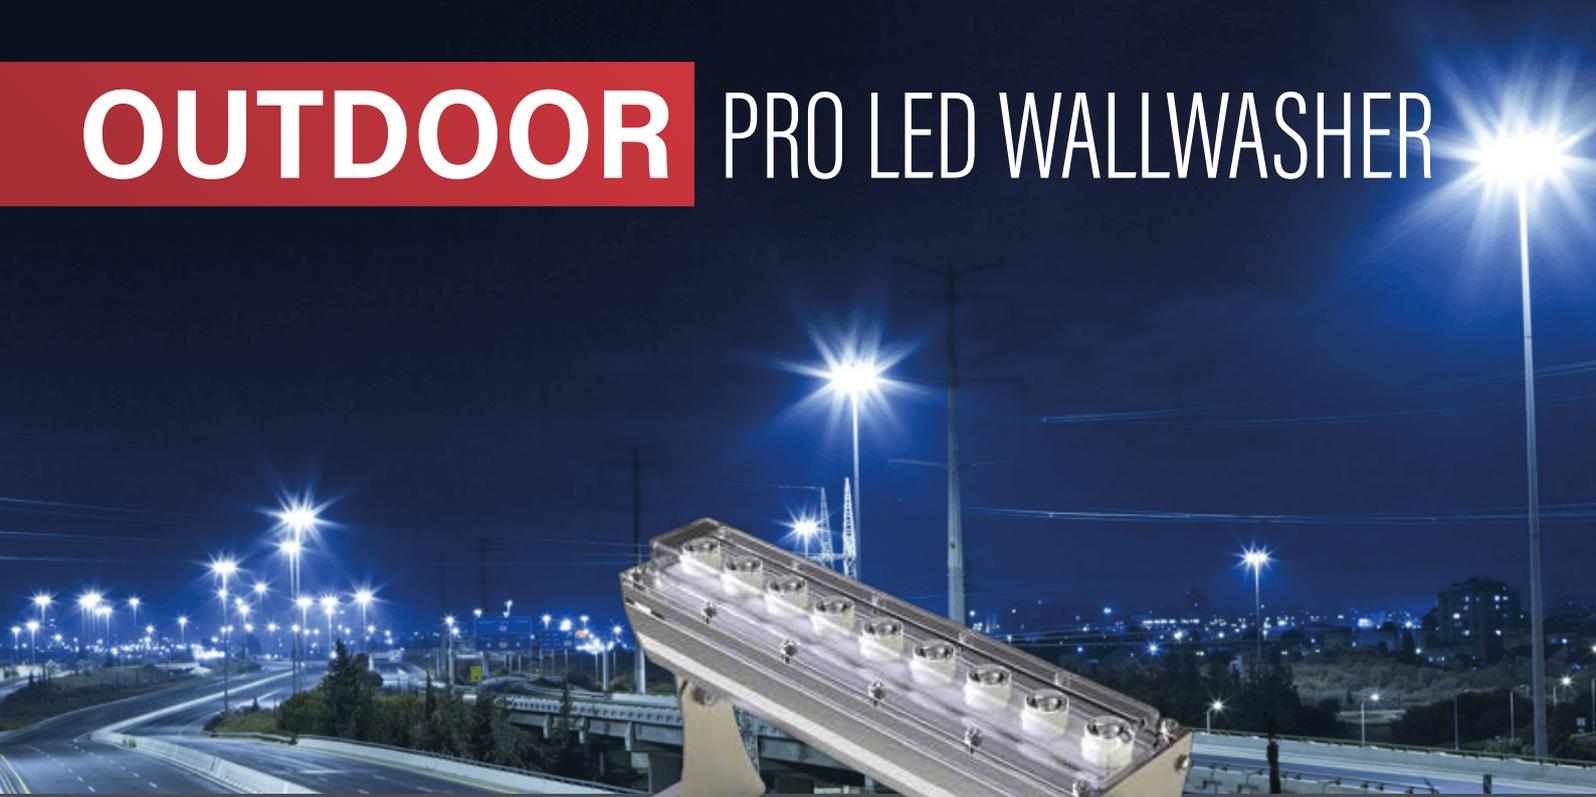


* LED Wallwasher Technical Specifications:

Lamp Type: Power LED
Warranty: 5 Year
Housing: Extruded Aluminium
Glass: PC
Paint: Anodized
IP: 67
Kelvin: 3000-4000-6000-R-G-B
CRI: >80
LED Lifetime: 50.000 h
Power Supply: 220-240 AC 50-60 Hz.
Environment: Outdoor
Installation: Wall

* LED WALLWASHER 25 CM / 10 W



* LED WALLWASHER 50 CM / 20 W

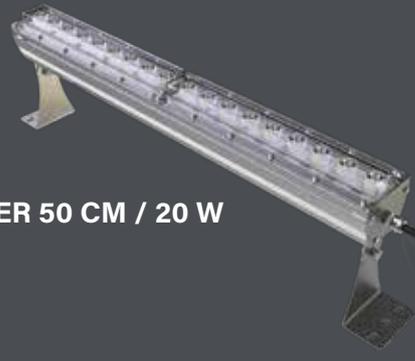

* LED WALLWASHER 75 CM / 30 W



* LED WALLWASHER 100 CM / 40 W



MODEL	POWER	LED NUMBER	INPUT VOLTAGE	EFFICIENCY	LUMINOUS FLUX	BODY DIMENSIONS	PACK DIMENSION	WEIGHT
WL10W9L	10 W	9	220-240V AC 50Hz.	%90	-	120x250x60mm	76x400mm	0,7kg
WL20W18L	20 W	18	220-240V AC 50Hz.	%90	-	120x500x60mm	76x650mm	1,1kg
WL30W27L	30 W	27	220-240V AC 50Hz.	%90	-	120x750x60mm	76x900mm	1,5kg
WL40W36L	40 W	36	220-240V AC 50Hz.	%90	-	120x1000x60mm	76x1150mm	2kg